




**Airlink M 210 T** junction boxes are used to joint and shunting three core armoured cables having cross-section area up to 120 mm<sup>2</sup>.

They are made of 25/10 mm bent metal sheets protected by outdoor painting treatment.

Airlink M 210 T can be fixed to the wall or rested to the floor through slides made of 1" 1/4 hot galvanised pipe available as optional.

Insulating parts are made of porcelain with long creeping distance.

External bolts are made of stainless steel. Internal parts are zinc-coated.

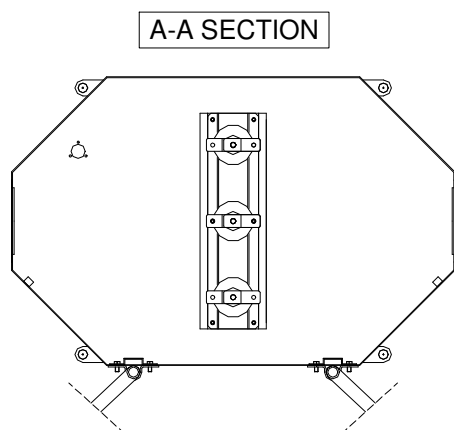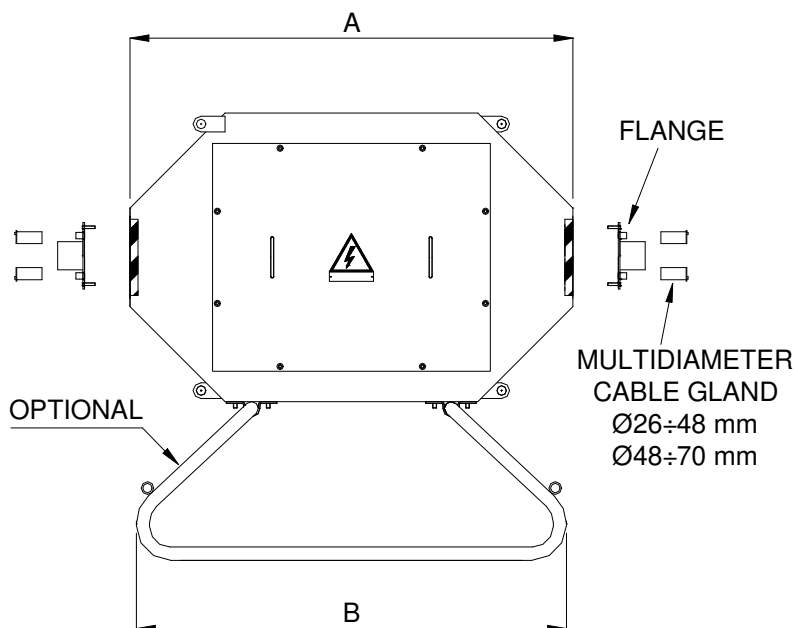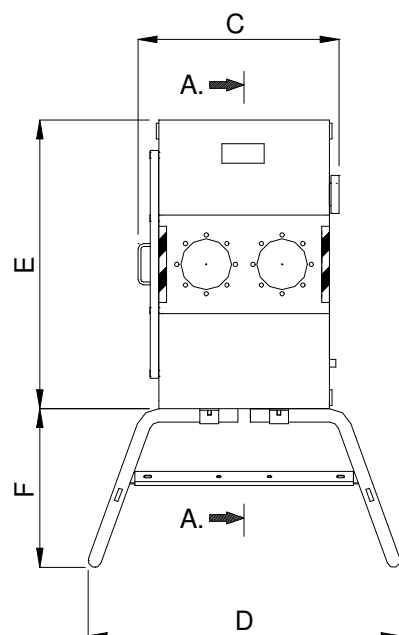

Protection degree : IP 55  
Standards : CEI 17-6 IEC 298  
Colour : red RAL 3020 (other on request)

| Voltage (kV) | DIMENSIONS (mm) |      |     |     |     |     | Weight (kg) |
|--------------|-----------------|------|-----|-----|-----|-----|-------------|
|              | A               | B    | C   | D   | E   | F   |             |
| 7.2          | 1200            | 1360 | 500 | 988 | 740 | 500 | 90*         |
| 12           | 1300            | 1360 | 576 | 988 | 810 | 500 | 110*        |
| 17.5         | 1400            | 1360 | 636 | 988 | 910 | 500 | 156*        |

\*Slides type

## ELECTRICAL CHARACTERISTICS

Rated normal current ( 40 °C ) up to 400 A

Rated isolation voltage 7.2 / 12 / 17.5 kV

Withstand voltage at 50 Hz (1 min.) 20 / 28 / 38 kV

Impulse withstands voltage 60 / 75 / 95 kV